

MU Guide

Calibration of Lagoon Irrigating Equipment

Charles Fulhage and Don Pfof
Department of Biological and Agricultural Engineering



Proper calibration of irrigation equipment uses fertilizer nutrients and protects water resources.

A properly calibrated irrigation system can be an efficient and uniform method for land application of liquid nutrients. Application should be done at a time and at a rate so that polluted runoff does not enter the waters of the state. Total nitrogen applied annually must not exceed the design for an approved system. Thus, depth of annual application depends upon the nutrient (nitrogen) analysis of the effluent.

Three performance characteristics are critical to proper land application of lagoon effluent by irrigation. These characteristics are determined by site conditions and requirements as shown in the table that follows.

Sprinkler application rate is a characteristic of sprinkler hardware and operating parameters (i.e., nozzle type, size, trajectory, and pressure). Hence sprinklers should be selected to be compatible with soil infiltration rate or permeability. If sprinkler application rate is

higher than soil infiltration rate, the possibility for runoff is increased. Since runoff must be prevented when irrigating lagoon effluent, sprinklers are often selected for the lowest application rate possible.

Depth of application per irrigation event should be matched to the water holding capacity of the soil (Table

Performance characteristic	Determined by
Sprinkler application rate	Soil infiltration rate or soil permeability rate
Depth of application per irrigation event	Soil water holding capacity (depends on soil type and soil moisture content at time of irrigation)
Total depth of effluent applied annually	Amount of nitrogen or other limiting nutrient allowed annually under nutrient management plan

Table 1. Maximum water application rates (From MWPS-18, *Livestock Waste Facilities Handbook*). Soils usually absorb water at a faster rate if applied in light applications (0.75"– 1.5" or less) when the soil is dry.

Soil characteristics	0% – 5% slope	
	Cover	Bare
	— in./hr —	
Clay; very poorly drained	0.3	0.15
Silty surface; poorly drained clay and claypan subsoil	0.4	0.25
Medium textured surface soil; moderately to imperfectly drained profile	0.5	0.30
Silt loam, loam and very sandy loam; well to moderately well drained	0.6	0.40
Loamy sand, sandy loam, or peat; well drained	0.9	0.60

Reduce application rates on sloping ground:

Slope, percent	Application rate reduction
0–5	0%
6–8	20%
9–12	40%
13–20	60%
over 20	75%

2). Exceeding the water holding capacity of the soil can result in runoff and contamination of surface water. Depth of application is determined by duration of operation in the case of stationary sprinklers, and by travel speed in the case of traveling sprinklers.

The total depth of effluent applied annually should provide the target amount of nutrients to the receiving area on a yearly basis as specified in the nutrient management plan. This may be accomplished in a single irrigation event, or may require several separate applications, depending on site conditions.

Application rate

The maximum allowable rate of application (inches per hour) to prevent runoff depends on the intake rate of the soil. Intake rate of an initially dry soil typically decreases at a high rate as water is added and approaches the permeability of the soil. County soil surveys give the permeability of soils in inches per hour and the available water holding capacity in inches per inch. The total amount (inches) of an application depends upon the water holding capacity (moisture deficit) of the soil at the time of application. Contact your local Natural Resources Conservation Service office for a current soil survey. If soil surveys are not available, the data in Tables 1 and 2 may be used as a guide. Table 3 is a guide for determining soil moisture content by feel and appearance.

The average application rate of an irrigation sprinkler varies with nozzle opening size, number of nozzles (usually 1 to 3 per sprinkler), pressure and wetted diameter. Sprinklers with one large nozzle will reduce clogging problems when irrigating with animal wastewater. Big guns generally have only one large nozzle, specifically designed for long-throw distance. Wetted diameter

varies with nozzle size, pressure and sprinkler angle. Data for sprinklers and big guns can be found in the manufacturer’s literature. Table 4 has general data for big guns, if manufacturer’s data are not available for planning.

Application rate varies with distance from the sprinkler (or gun). If the sprinkler produces a triangular application pattern, proper spacing should achieve a nearly uniform application depth. Sprayer application pattern can vary with operating pressure. To attain acceptable application uniformity with multiple sprinkler setups, the sprinkler spacing should be 65 percent to 80 percent of the wetted diameter. Overall uniformity can be affected by wind velocity. If possible, try to irrigate when the wind is under 5 mph. Sprinkler spacing variations with wind are given in Table 5. High trajectory sprinklers are used for low wind conditions to obtain maximum distance of throw. Low trajectory sprinklers will give shorter distance of throw and a minimum of pattern distortion.

Table 2. Available water holding capacity of various soils.

Soil type	Moisture capacity in./ft. of soil depth
Coarse sands	0.25 – 0.75
Fine sands	0.75 – 1.00
Loamy sands	1.10 – 1.20
Sandy loams	1.25 – 1.40
Fine sandy loam	1.50 – 2.00
Silt loam	2.00 – 2.50
Silty clay loam	1.80 – 2.00
Silty clay	1.50 – 1.70
Clay	1.20 – 1.50

Table 3. Guide for determining soil moisture content (From MWPS-18, *Livestock Waste Facilities Handbook*).

Moisture condition	Percent of available moisture remaining in soil	Soil texture		
		Sand-sandy loam	Loam-silt loam	Clay loam-clay
Dry	0% Wilting point	Dry, loose, flows through fingers.	Powdery, sometimes slightly crusted but easily broken into powder.	Hard, baked, cracked; difficult to break into powder.
Low	50% or less	Loose, feels dry	Forms a weak ball when squeezed but will not stick to tools.	Pliable, but not slick balls under pressure. Sticks to tools.
Fair	50% – 75%	Balls under pressure but seldom holds together when bounced in hand.	Forms a ball somewhat plastic, sticks slightly with pressure. Does not stick to tools.	Forms a ball, ribbons out between thumb and forefinger, has a slick feeling.
Good	75% – 100%	Forms a weak ball, breaks easily when bounced in the hand; can feel moistness.	Forms a ball, very pliable, sticks readily, clings slightly to tools.	Easily ribbons out between thumb and forefinger, has a slick feeling, very sticky.
Ideal	100%	Soil mass clings together. Upon squeezing, outline of ball is left on hand.	Wet outline of ball is left on hand when soil is squeezed. Sticks to tools.	Wet outline of ball is left on hand when soil is squeezed. Sticky enough to cling to fingers.

Calibration of stationary big gun sprinkler systems

The average rate of application of a stationary sprinkler, operating full circle, is calculated as follows:

$$R, \text{ inches/hour} = \frac{\text{gpm} \times 96.3}{\text{wetted area}} = \frac{\text{gpm} \times 96.3}{0.7854 \times (\text{wetted dia.}, \text{ ft})^2}$$

The average rate and depth of application from multiple settings of a stationary gun or a *solid set* system vary with the net area covered from a given sprinkler location. Sprinkler locations are usually in a square or rectangular pattern but may be in a triangular pattern (see Figure 1).

Examples

The following equations are aids for selecting sprinkler equipment and developing management procedures for sprinkler operation.

System flow rate required to pump a lagoon in a given number of 8-hour days.

$$Q = 0.0156 \times V/N \quad (1)$$

Q = system flow rate, gallons per minute

V = lagoon pumpdown volume, cu ft

N = number of 8-hr days to pump lagoon

Average application rate of a single-set, or multi-set sprinkler system.

For a single-set sprinkler.

$$AR = 122.6 \times Q/(WD)^2 \quad (2)$$

For a multi-set sprinkler system.

$$AR = 96.3 \times Q/(WD \times SP)^2 \quad (3)$$

AR = average application rate, in./hr

Q = system flow rate, gallons per minute

WD = wetted diameter of sprinkler, ft.

SP = sprinkler spacing, fraction of wetted diameter

Time to operate system to obtain a given depth of application.

$$TD = D/AR \quad (4)$$

TD = time to operate sprinkler to obtain a given depth of application, hr.

D = depth of application, in.

AR = application rate, in/hr.

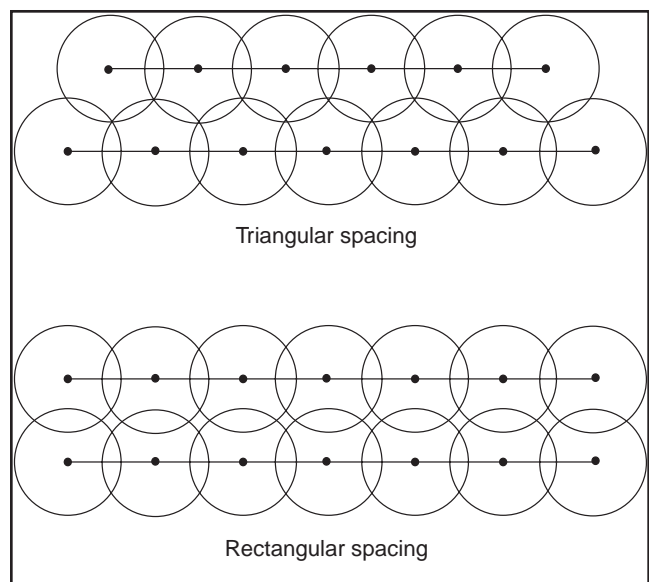


Figure 1. Effect of sprinkler spacing and arrangement. Note that the rectangular pattern requires closer spacing to achieve full coverage and reasonable uniformity.

Table 4. Discharge of big gun nozzles (From MWPS-18, , *Livestock Waste Facilities Handbook*). Taper bore nozzles have the greatest stream integrity, longest throw distance and minimum wind distortion. Ring nozzles have better stream breakup for lower pressure operation and delicate crops. Ring nozzles catch animal hair on the nozzle lip and plug more often than taper bore nozzles. Diameter is the size of the area irrigated; gpm is the application rate.

		Nozzle trajectory												
		24°						27°						
Pressure psi	Dia. ft	gpm	Dia. ft	gpm	Dia. ft	gpm	Dia. ft	gpm	Dia. ft	gpm	Dia. ft	gpm	Dia. ft	
Taper bore:	0.6"	0.7"	0.9"	1.1"	1.3"	1.5"	1.75"							
Ring nozzle:	—	0.86"	1.08"	1.26"	1.41"	1.74"	1.93"							
50	74	225	100	250	165	290	255	330						
60	81	240	110	265	182	305	275	345	385	390	515	430	695	470
70	88	250	120	280	197	320	295	360	415	410	555	450	755	495
80	94	260	128	290	210	335	315	375	445	430	590	470	805	515
90	100	270	135	300	223	345	335	390	475	445	626	485	855	535
100	106	280	143	310	235	355	355	400	500	460	660	500	900	550
110	111	290	150	320	247	365	370	410	525	470	695	515	945	565
120			157	330	258	375	385	420	545	480	725	530	985	580
130									565	485	755	540	1025	590

Time to operate system to obtain a given amount of nutrient per acre.

$$TN = 0.0368 \times NA / (AR \times C) \quad (5)$$

TN = time to operate sprinkler to obtain a given amount of nutrient per acre.

NA = target nutrient application, lb/acre.

AR = application rate, in/hr.

C = nutrient content in lagoon effluent, lb per 1,000 gallons.

Example

A 200-cow dairy has an annual pumpdown volume of 400,000 cubic feet. It is desired to accomplish this pumpdown in 12 days of eight hours pumping time each. Select a single-set, stationary gun sprinkler to apply the effluent to a soil-plant filter with a medium textured silty clay soil that is moderately drained. The receiving area will have a vegetative cover, and slopes are in the range of 6 percent to 8 percent. Laboratory tests show a nitrogen concentration of 2.8 pounds per 1,000 gallons in the lagoon effluent. Target annual nitrogen application is 140 pounds per acre. Use the above equations and data in Tables 1, 2, 3 and 4; select the sprinkler and calculate the appropriate operating time for each sprinkler setting, and the total operating time to achieve the target nitrogen application rate.

1. Calculate the system flow rate needed to pump the lagoon in 12 days using equation (1).

$$Q = 0.0156 \times 400,000 / 12 = 520 \text{ gal./min.}$$

2. Select a sprinkler which will give this flow rate from Table 4.

Two of the 27-degree trajectory nozzles listed would give the desired flow rate. A 1.41-inch ring nozzle operating at 110 psi gives 525 gpm with a wetted diameter of 470 feet. A 1.74-inch ring nozzle operating at 60 psi gives 515 gpm with a wetted diameter of 430 feet.

3. Check sprinkler application rate for compatibility with soil infiltration rate. From Table 1, a moderately drained, medium textured silty clay soil has a maximum application rate of 0.5 inches per hour with a vegetative cover. This rate should be reduced by 20 percent since slopes are 6 percent to 8 percent. Target application rate is then

$$0.5 \text{ in/hr} \times 0.8 = 0.4 \text{ in/hr.}$$

Calculate application rate for the nozzles noted previously using equation (2) for single-set operation.

1.41-inch ring nozzle:

$$AR = 122.6 \times 525 / (470)^2 = 0.29 \text{ in/hr}$$

Table 5. Typical sprinkler spacing with adjustment for wind.

Wind speed, mph	Sprinkler spacing, percent of wetted diameter
0	80
5	70
10	60
over 10	50

1.74" ring nozzle:

$$AR = 122.6 \times 515 / (430)^2 = 0.34 \text{ in./hr}$$

Since both of these nozzles have suitable application rates, (less than 0.4 inches per hour) selection might be based on pressure requirement or some other factor. Note that a gun spacing of 70 percent of wetted diameter (multiple gun set) would increase application rate by about 60 percent. If application rate is greater than the maximum for a given soil, take care to irrigate with light applications when the soil is dry. Assume that the 1.41-inch ring nozzle will be used in this example.

4. Calculate time to operate sprinkler to obtain a given depth of application. Assume that irrigation will take place when the soil is at the 50 percent moisture condition, and that the applicable root zone depth is 1.5 feet. From Table 2, a silty clay soil has a water holding capacity of 1.6 inches per foot depth of soil. The depth of water to apply is calculated as follows.

$$\text{Depth} = 1.6 \text{ in/ft} \times 1.5 \text{ ft} \times 0.5 = 1.2 \text{ inches}$$

Calculate the time to apply 1.2 inches using equation (4).

$$TD = 1.2 / 0.29 = 4.1 \text{ hr}$$

The sprinkler should be operated 4.1 hours to achieve the target application depth of 1.2 inches.

5. Calculate the total time required to apply 140 pounds of nitrogen per acre annually, using equation (5).

$$TN = 0.0368 \times 140 / (0.29 \times 2.8) = 6.3 \text{ hr}$$

Since the operating time for nitrogen is greater than the operating time for soil conditions, the total annual operating time of 6.3 hours could be broken into two equal irrigation events of 3.15 hours each. This approach would minimize the risk of runoff, and may allow irrigating on soil with a higher moisture content, since less water will be applied each time.

Calibration of traveling big gun sprinkler systems

The sprinklers on traveling big guns are usually equivalent to stationary big guns. However, the sprinkler may be operated part-circle to keep a dry travel lane ahead of the traveling gun. This increases the instantaneous application rate due to the decreased area of application, and also slightly affects the uniformity of application. (The application rate for part-circle gun operation may be found by dividing the rate in inches per hour for full-circle operation by the fraction of full-circle the gun is operated.) The depth of liquid applied by a traveling gun depends on the flow rate (gpm), the

lane spacing and the travel speed. Table 6 has depth of water applied as a function of these variables. Table 7 shows acres irrigated per set as a function of lane spacing and travel distance. Table 8 recommends lane spacings for windy conditions.

The following equations are aids in calibrating and managing the operation of traveling gun sprinklers.

Average application rate of a traveling gun sprinkler.

$$AR = 122.6 \times Q / (WD \times WD \times F) \quad (6)$$

AR = average application rate, in./hr

Q = flow rate, gallons per minute

WD = wetted diameter of sprinkler, ft

F = fraction of full circle operation

Speed to operate a traveling gun sprinkler to obtain a given application depth.

$$S = 1.605 \times Q / (SP \times D) \quad (7)$$

S = travel speed, ft/min

Q = flow rate, gallons per minute

SP = traveling gun lane spacing, ft

D = depth of water applied, in

Depth of water to apply to obtain a given nutrient application rate.

$$D = 0.0368 \times NA / C \quad (8)$$

D = depth of water to apply, in

NA = target nutrient application, lb/acre

C = nutrient content in lagoon effluent, lb per 1,000 gallons

Example 2

A traveling gun is to be used to apply lagoon effluent under the conditions noted in Example 1. Assume that the nozzle will be operated part-circle with a 45-degree open segment to maintain a dry travel lane. Assume the traveling gun will use the same nozzle selected in Example 1. Calculate the gun travel speed required to apply the proper depth with the 50-percent soil-moisture condition. Also calculate the total depth-to-apply annually to obtain 140 pounds of nitrogen per acre.

1. Check sprinkler application rate for compatibility with soil infiltration rate. The fraction of full circle operation is $(360 - 45) / 360 = 0.875$

Using the 1.41-inch ring nozzle, and equation (6).

$$AR = 122.6 \times 525 / (470 \times 470 \times 0.875) = 0.33 \text{ in./hr}$$

Since this is less than the 0.4 inch per hour soil infiltration rate, the application rate is acceptable without

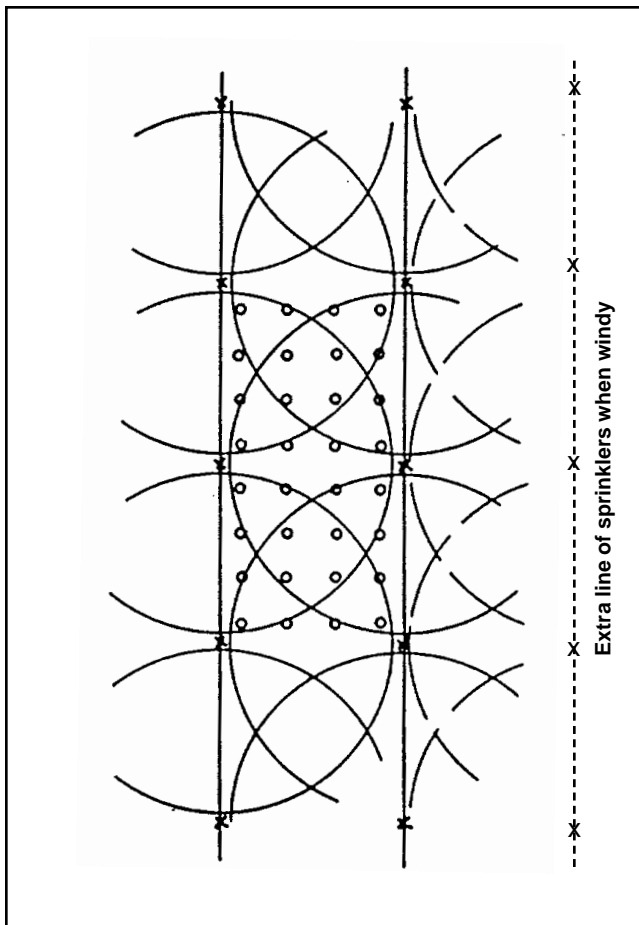


Figure 2. Catch-container for solid set (block) sprinkler layout.

modification.

2. Calculate the travel speed required to apply the proper depth (1.2 inches) under 50 percent soil-moisture conditions. Use equation (7) and assume a lane spacing of 70 percent of wetted diameter.

$$S = 1.605 \times 525 / (470 \times 0.7 \times 1.2) = 2.13 \text{ ft/min}$$

3. Calculate the depth of water to apply to obtain 140 pounds of nitrogen per acre, using equation (8).

$$D = 0.0368 \times 140 / 2.8 = 1.84 \text{ inches}$$

Since this depth is greater than the 1.2 inches for the 50 percent soil-moisture condition, the target nitrogen application will have to be obtained using two passes, or with a single pass under drier soil conditions. If two passes were used, each applying $1.84 / 2 = 0.92$ inches, gun travel speed would be calculated as follows using equation (7).

$$S = 1.605 \times 525 / (470 \times 0.7 \times 0.92) = 2.78 \text{ ft/min}$$

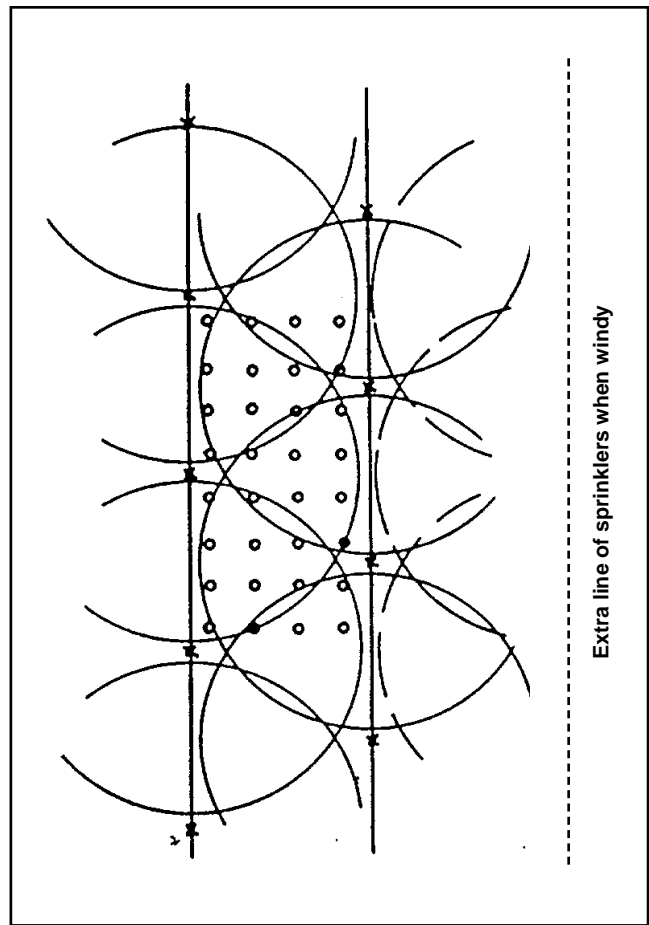


Figure 3. Catch-container layout for solid set (triangular) sprinkler layout.

Evaluation of application amount and uniformity

The calibration procedures above are predicated on the assumed performance of sprinklers operated at certain pressures and sprinkler spacings. To verify that the assumed performance is achieved, catch-cans for stationary sprinklers can be spaced as shown in Figures 2 and 3. Run tests until the average depth of wastewater in the cans is at least 1 inch; longer tests will reduce errors in measuring small amounts. Catch-cans for traveling guns can be placed in a line perpendicular to the direction of travel and between two adjacent travel lanes. Catch-cans should not be more than 10 feet apart. *Source: American Society of Agricultural Engineers, 1980.*



Published with partial support from the Missouri Department of Natural Resources from the Environmental Protection Agency, Region VII. To learn more about water quality and other natural resource issues, contact the Missouri Department of Natural Resources, P.O. Box 176, Jefferson City, MO 65102. Toll free 1-800-334-6946.

**Table 6. Water applied by traveling big guns (From MWPS-18, *Livestock Waste Facilities Handbook*).
Average water depth applied, in. = (1.605 x sprinkler gpm) ÷ (lane spacing, ft x travel speed, ft/min).
To convert table to gal/acre, multiply by 27,150.**

Sprinkler rate, gpm	Travel lane spacing, ft	Travel speed, ft/min							
		0.4	0.5	1	2	4	6	8	10
----- Water applied, inches -----									
50	105	1.9	1.5	0.76	0.38	0.19	0.13	0.096	0.076
	125	1.6	1.3	0.64	0.32	0.16	0.11	0.08	0.064
	155	1.3	1.0	0.52	0.26	0.13	0.09	0.065	0.052
60	110	2.2	1.8	0.88	0.44	0.22	0.15	0.109	0.088
	130	1.9	1.5	0.74	0.37	0.19	0.12	0.093	0.074
	160	1.5	1.2	0.60	0.30	0.15	0.10	0.075	0.060
70	115	2.4	2.0	0.98	0.49	0.24	0.16	0.122	0.098
	140	2.0	1.6	0.80	0.40	0.20	0.13	0.100	0.080
	170	1.7	1.3	0.66	0.33	0.17	0.11	0.083	0.066
80	120	2.7	2.1	1.07	0.54	0.27	0.18	0.134	0.107
	145	2.2	1.8	0.89	0.44	0.22	0.15	0.111	0.089
	180	1.8	1.4	0.71	0.36	0.18	0.12	0.089	0.071
90	125	2.9	2.3	1.16	0.58	0.29	0.19	0.144	0.116
	150	2.4	1.9	0.96	0.48	0.24	0.16	0.120	0.096
	185	2.0	1.6	0.78	0.39	0.20	0.13	0.098	0.078
100	165	2.4	1.9	0.97	0.49	0.24	0.16	0.12	0.10
	200	2.0	1.6	0.80	0.40	0.20	0.13	0.10	0.08
200	165	4.9	3.9	1.9	1.0	0.5	0.32	0.24	0.20
	200	4.0	3.2	1.6	0.8	0.4	0.27	0.20	0.16
300	200	6.0	4.8	2.4	1.2	0.6	0.40	0.30	0.24
	270	4.5	3.6	1.8	0.9	0.4	0.30	0.22	0.18
400	240	6.7	5.4	2.7	1.3	0.7	0.45	0.33	0.27
	300	5.4	4.3	2.1	1.1	0.5	0.36	0.27	0.21
500	270	7.4	5.9	3.0	1.5	0.7	0.50	0.37	0.30
	330	6.1	4.9	2.4	1.2	0.6	0.41	0.30	0.24
600	270	8.9	7.1	3.6	1.8	0.9	0.59	0.45	0.36
	330	7.3	5.8	2.9	1.5	0.7	0.49	0.37	0.29
700	270	10.4	8.3	4.2	2.1	1.0	0.69	0.52	0.42
	330	8.5	6.8	3.4	1.7	0.9	0.57	0.43	0.34
800	300	10.7	8.6	4.3	2.1	1.1	0.71	0.54	0.43
	360	8.9	7.1	3.6	1.8	0.9	0.59	0.45	0.36
900	300	12.0	9.6	4.8	2.4	1.2	0.80	0.60	0.50
	360	10.0	8.0	4.0	2.0	1.0	0.67	0.50	0.40
1,000	330	12.2	9.7	4.9	2.4	1.2	0.81	0.61	0.50
	400	10.0	8.0	4.0	2.0	1.0	0.67	0.50	0.40

Table 7. Acres irrigated per setting by traveling big guns (from MWPS-18). For best watering uniformity, make lane spacing 50 percent to 70 percent of the sprinkler wetted diameter.

Lane spacing, (feet)	Travel distance	
	600 feet	1,000 feet
-- acres/set --		
100	1.5	2.3
120	1.8	2.8
140	2.1	3.2
160	2.4	3.7
180	2.7	4.1
200	3.0	4.6
220	3.3	5.1
240	3.6	5.5
260	3.9	6.0
280	4.2	6.4
300	4.5	6.9
320	4.8	7.3
340	5.2	7.8
360	5.5	8.3
380	5.8	8.7
400	6.1	9.2

Table 8. Maximum lane spacing for traveling big guns (from MWPS-18, *Livestock Waste Facilities Handbook*).

Sprinkler wetted	Percent of wetted diameter									
	50	55	60	65	70	75	80			
dia., ft	Wind over 10 mph		Wind up to 10 mph		Wind up to 5 mph		No wind			
200	100	110	120	130	140	150	160			
250	125	137	150	162	175	187	200			
300	150	165	180	195	210	225	240			
350	175	192	210	227	245	262	280			
400	200	220	240	260	280	300	320			
450	225	248	270	292	315	338	360			
500	250	275	300	325	350	375	400			
550	275	302	330	358	385	412	440			
600	300	330	360	390	420	—	—			

For further information

American Society of Agricultural Engineers. 1980. *Design and Operation of Farm Irrigation Systems*. ASAE Monograph No. 3. 2950 Niles Road, St. Joseph, Mich.

MWPS-18, *Livestock Waste Facilities Handbook*. 1985. Midwest Plan Service, Iowa State University, Ames.

University of Arkansas Extension Publication FSA 1022-S459. 1993. *Calibrating Traveling Big Gun Sprinklers for Manure Applications*. University of Arkansas Cooperative Extension Service, Little Rock, Ark.

University of Arkansas Extension Publication FSA 1023-S460. 1993. *Calibrating Stationary Big Gun Sprinklers for Manure Applications*. University of Arkansas Cooperative Extension Service, Little Rock, Ark.

U.S. Department of Agriculture, Natural Resources Conservation Service. *Agricultural Waste Management Field Handbook*.



■ Issued in furtherance of Cooperative Extension Work Acts of May 8 and June 30, 1914, in cooperation with the United States Department of Agriculture. Ronald J. Turner, Director, Cooperative Extension, University of Missouri and Lincoln University, Columbia, MO 65211. ■ University Outreach and Extension does not discriminate on the basis of race, color, national origin, sex, religion, age, disability or status as a Vietnam era veteran in employment or programs. ■ If you have special needs as addressed by the Americans with Disabilities Act and need this publication in an alternative format, write ADA Officer, Extension and Agricultural Information, 1-98 Agriculture Building, Columbia, MO 65211, or call (573) 882-7216. Reasonable efforts will be made to accommodate your special needs.